



PRODUCT DATA SHEET: SBE1 DESKTOP

The SBE1 DESKTOP Desktop is available in a range of colours, easy to use and fits nicely into any record bag. Powered by a 9V battery lasting nights.

This unit comes packed with the dub siren, bomb and echo all incased in a vibrant case.

This Siren combines both the classic vintage NJD style siren. And the classic 8 sounds key which plays the typical guns and bomb noises on vintage mixers.

For a full dub sytle effect our unique dub echo design is included in the unit.

This unit contains professionally designed and manufactured, gold plated, PCB's, found only in Rigsmith' s units.

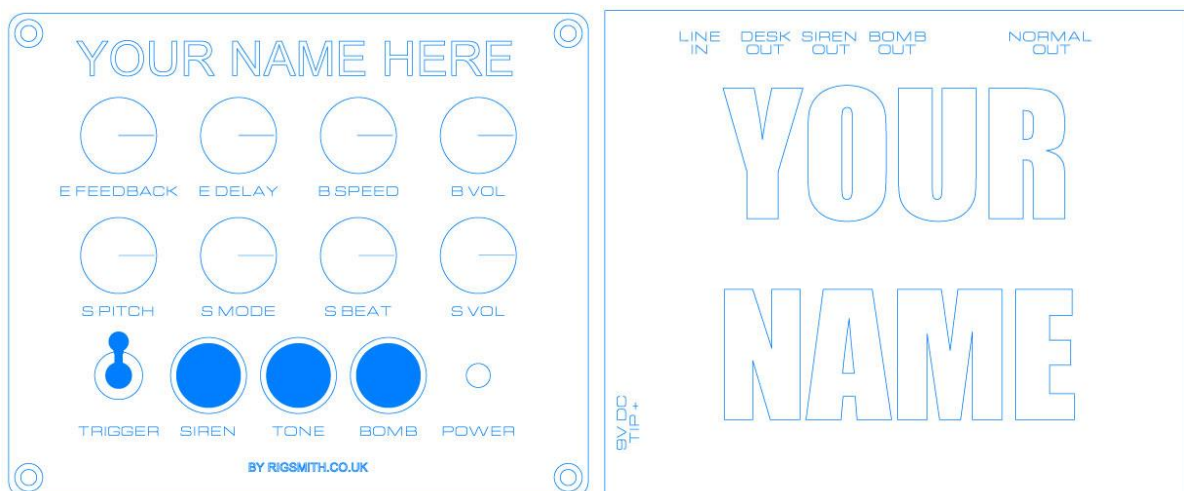


Figure 1: SBE1 DESKTOP TOP PANEL, LEFT, BOTTOM PANEL, RIGHT



PRODUCT DATA SHEET: SBE1 DESKTOP

Technical Data

Figure 1: SBE1 DESKTOP TOP PANEL, LEFT

E Feedback:	Echo feedback
E Delay:	Echo delay length .
B Speed:	Bomb speed.
B Vol:	Bomb volume.
S Pitch:	Siren pitch.
Siren Mode:	Square / Ramp modulation switch.
Siren Beat:	Mode Speed, 1: slow, 2: Med, 3: Fast. Off: Ramp controlled via Siren and Tone switches
Siren Vol:	Siren volume.
Trigger:	?????? Master On/Off. Up = momentarily on, down = Latched on, Centre = off
Siren:	Fully restarts the Siren LFO.
Tone:	Partly restarts the Ramps in some modes when Beat = off
Bomb:	Starts bomb
Power:	LED indicating power on/off. Powered by 9V battery.

Figure 1: SBE1 DESKTOP BOTTOM PANEL, RIGHT

Line In:	Line in.
Desk Out:	Echoed parts only (for mixing desks)
Siren Out:	Siren only (Disconnects from echo system)
Bomb Out:	Bomb only (Disconnects from echo system)
Normal Out:	Dry Audio signal + echos



PRODUCT DATA SHEET: SBE1 DESKTOP

INTERNAL

9V battery Holder

PP3 9V square type battery (Battery not included)

Need further help?

Contact us at

info@rigsmith.co.uk

Your name / logo can be added to customise your item. Please contact us for further info.
